




## Installation Instructions for Mustang Cyclone solo seat on 2006-2011 Dyna family models



1. Attach Cyclone solo seat to Mustang frame cover using supplied hardware.
2. Insert one 1/4-20 x 1 1/2" long screw through bottom of frame cover, through the 3/4" plastic spacer, and into the threaded hole at the nose of the solo seat; insert two 1/4-20 x 1 1/2" long screws through the flat washers, through the bottom of the frame cover, through the 5/8" rubber bumpers and into the threaded holes near the back of the solo seat.
3. Tighten all three screws. Solo is now fastened permanently to the frame cover. This assembly will go onto the bike's frame as a unit.
4. Remove the stock seat(s) from the bike. Remove the long bolt at the base of the gas tank. Save the stock 5/16-18 nut to be used with Mustang bolt later.
5. Position the solo and frame cover on the bike frame making sure that the bracket on the bottom center of the frame cover is engaged against the back of the frame opening. (see pictures on next page)
6. Align the front mounting bracket with base of gas tank and insert the supplied plastic washers on the inside edges of the bracket; then insert the 4" long bolt through bracket and gas tank lugs. Install stock nut and tighten. (see pictures on next page)

# Installation Instructions for Mustang Cyclone solo seat on 2006-2011 Dyna family models

Remove stock gas tank bolt and save nut

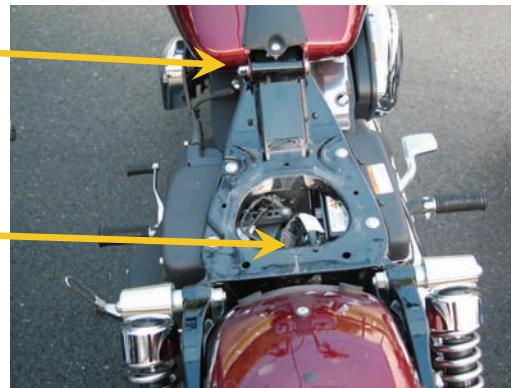

Bracket on bottom of Mustang frame cover must engage against this surface



Frame cover shown in place without solo seat for clarity of proper installation



**Enjoy the comfort and good looks of your new Cyclone solo seat, shown here with a Mustang fender bib, part #78026.**

These steps are guidelines to help you install your new Mustang product. If you need further assistance please call us at 800-243-1392, Monday through Friday 9:00 - 5:30 Eastern or send an e-mail to [questions@mustangseats.com](mailto:questions@mustangseats.com) or visit our website at [www.mustangseats.com](http://www.mustangseats.com).

For care and maintenance of our seats, please go to our website under "Support".  
Ref: part #'s 76633